



# Screw-in probe M6 with silicone cable

Order nr.: 803161 2011

Screw-in probes with silicone cable measure the temperature in pipes or vessels and can be used from -50 °C to +180 °C. Silicone seals well and remains flexible even at temperatures below freezing. To configure your screw-in probe for your measuring task, simply select the required configuration features and send us the order code.



General Information	
Measuring range	-50 °C to +180 °C depending on sensor type and connection cable
Perm. °C range cable	-50 °C to +180 °C
Accuracy	depending on sensor type
Response time	t63 / t99: information is available on request
Pull-out force	≥ 30 N
Supply and output	
Max. measurement current	max. 1 mA
Supply voltage	approx. 5 V depending on measurement current
Measurement signal	passive (resistance value)
Ambient conditions	
Protection class	IP65 according DIN 60529 (depending on cable)
Humidity and moisture condensation resistance	according to application-specific qualification
Certificates and Standards	
Standards	DIN EN 61326-1:2013   DIN EN IEC 63000:2019-05
Directive	RoHS 2011/65/EU   2014/30/EU
Certificates	Certificate of suitability (on request)



### Customizable options

- A - Measuring element
- B - Connection type
- CE - Material connection cable
- F - Length connection cable
- G - Connector
- H - Bend protection



A - Measuring element				
Code	Sensor	Accuracy / Tolerance resistance	min <sup>2)</sup>	max <sup>2)</sup>
A012	Pt100	Cl. B dT = ±(0,30 °C + 0,005 t ) <sup>1)</sup>	-50 °C	+400 °C
A011	Pt100	Cl. A dT = ±(0,15 °C + 0,002 t ) <sup>1)</sup>	-50 °C	+300 °C
A013	Pt100	1/3 Cl. B dT = ±(1/3 · (0,30 °C + 0,005 t )) <sup>1)</sup>	-50 °C	+200 °C
A014	Pt100	1/10 Cl. B dT = ±(1/10 · (0,30 °C + 0,005 t )) <sup>1)</sup>	±0 °C	+100 °C
A022	Pt500	Cl. B dT = ±(0,30 °C + 0,005 t ) <sup>1)</sup>	-70 °C	+500 °C
A032	Pt1000	Cl. B dT = ±(0,30 °C + 0,005 t ) <sup>1)</sup>	-50 °C	+400 °C
A031	Pt1000	Cl. A dT = ±(0,15 °C + 0,002 t ) <sup>1)</sup>	-50 °C	+300 °C
A105	NTC 5 kOhm	R25 = 5 KOhm ±1 %	-40 °C	+125 °C
A110	NTC 10 kOhm	R25 = 10 KOhm ±1 %	-40 °C	+125 °C
A120	NTC 20 kOhm	R25 = 20 KOhm ±1 %	-40 °C	+125 °C

B - Connection type	
Code	Conn. type
B2	2-Wire (2W)
B3	3-Wire (3W)
B4	4-Wire (4W)


Possible connections			
Sensor	2W	3W	4W
Pt	✓	✓	✓
NTC	✓		

<sup>1)</sup>according to IEC 751 / EN 60751 | <sup>2)</sup> Perm. range °C | The measuring range depends on the measuring element and the connecting cable. | Detailed information and the characteristics can be found in our download area.



Screw-in thread		
Picture	Screw-in thread	Technical drawing
	Material	Stainless steel 1.4301   SUS 304
	Length (mm)	9
	Process connection	M6
	Wrench size	10
	<b>Protection sleeve</b>	
	Material	Stainless steel 1.4301   SUS 304
	Mounting length (mm)	17
	Ø (mm)	4,5 <sup>1)</sup>
		


other protective sleeve lengths and Ø available on request | <sup>1)</sup> Tolerance ± 0,1 mm |

E - Cable material and configuration connection cable												
Picture	Code	Connection type	Color	IP	From (°C) <sup>1)</sup>	To (°C) <sup>1)</sup>	Outside material	Material strand	Color strand	Ø (mm) <sup>2)</sup>	Q (mm <sup>2</sup> ) <sup>3)</sup>	Ω / m <sup>4)</sup>
	E1200	2-Wire	red-brown	IP67	-50	+180	Silicone	FEP	rd, wt	3,2	0,22	0,08
	E1201	3-Wire	red-brown	IP67	-50	+180	Silicone	FEP	rd, wt, rd	3,2	0,22	0,08
	E1202	4-Wire	red-brown	IP67	-50	+180	Silicone	FEP	rd, wt, rd, wt	3,2	0,22	0,08

Insulation resistance: ≥ 100 MOhm at min. 100 VDC | <sup>1)</sup>Perm. range °C | <sup>2)</sup>Tolerance ± 0,2 mm | <sup>3)</sup> Tolerance ± 0,03 mm<sup>2</sup> | <sup>4)</sup> per single strand

F - Length									
Code	F010	F020	F030	F040	F050	F100	F150	F200	
m	1	2	3	4	5	10	15	20	

Other lengths on request

G - Connector		
Picture	Code	Feature
	G01	Insulated end ferrules (50 mm)

H - Bend protection				
Picture	Length (mm)	Material	Code	Feature
	50	Stainless steel spring 1.4310   SUS 302	H0	Without (Standard)
			H1	Metal bend protection <sup>1)</sup>

<sup>1)</sup>on request

Delivery and Assembly	
Assembly instructions	via process connection
Delivery and Packaging	Probe, separately packaged in PE bag

Your order code						
Order nr.	Measuring element	Connection type	Material connection cable	Length connection cable	Connector	Bend protection
803161 2011	A_____	B_____	E_____	F_____	G_____	H_____

## Matching accessories

Details of accessories can be found on our website.

Heat-conducting paste				
Article no.	Content	Thermal conductivity	Min / Max °C	Thermal resistance
809540 1000	10 ml	>2.5 W/mK	-30 °C to +280 °C	< 0.126

RL / KS / 28.07.2021




**Technical drawing**

**Customizable options**


- A - Measuring element
- B - Connection type
- CE - Material connection cable

- F - Length connection cable
- G - Connector
- H - Bend protection
- All dimensions in mm


**Ausführung 2-Leiter / 2-Wire version**

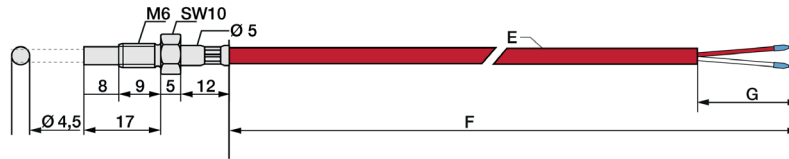

**Ausführung 3-Leiter / 3-Wire version**

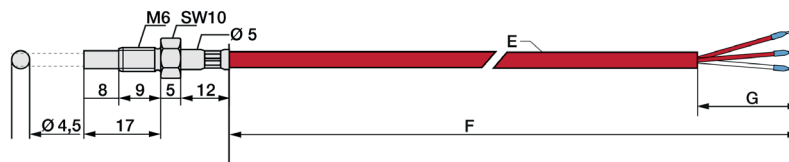


**Ausführung 4-Leiter / 4-Wire version**

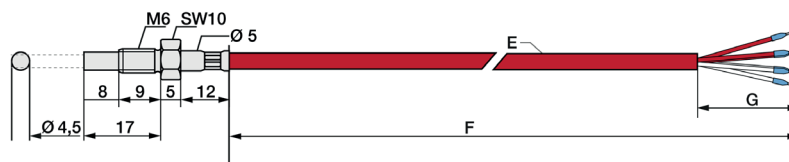

**Delivery and Assembly**

Delivery and Packaging Probe, separately packaged in PE bag

**Important assembly advices**

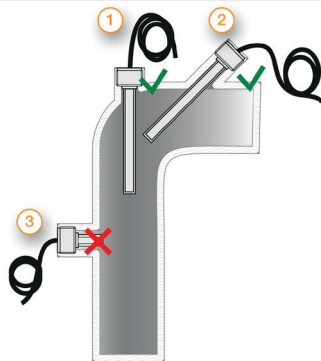

Measurement errors can occur due to heat dissipation to the environment. To keep these as small as possible, we recommend immersing the protection sleeve of your temperature probe as deeply as possible in the medium to be measured during installation. The optimum installation depth should be 10-15 times the  $\varnothing$  of the protection sleeve or, when using an immersion sleeve, the  $\varnothing$  of the immersion sleeve. When installing in pipelines whose  $\varnothing$  does not have a sufficiently deep installation depth, you should install the probe either at an angle or in a pipe elbow. Make sure that you have sufficient space so that the probe can be removed again. 1) Installation with sufficient installation depth 2) Installation at an angle with small pipe  $\varnothing$  3) Not like this: Minimum installation depth not reached

Please lay the cable in such a way that no water can penetrate the probe and with reserve loop (4). This allows you to extend the probe without disconnecting the electrical connection.

